

ES1AW THRU ES1JW-HAF

Surface Mount Superfast Recovery Rectifier

Reverse Voltage – 50 to 600 V


Forward Current – 1 A

Features

- Easy pick and place
- For surface mounted applications
- Low profile package
- Superfast recovery times for high efficiency
- Halogen and Antimony Free(HAF), RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

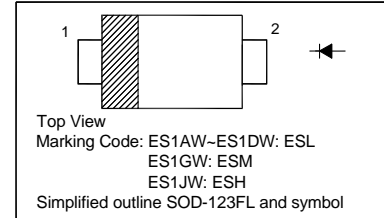

Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	ES1AW	ES1BW	ES1DW	ES1GW	ES1JW	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	V
Maximum Average Forward Rectified Current $T_L = 100^\circ\text{C}$	$I_{F(AV)}$	1					A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30					A
Maximum Forward Voltage at 1 A	V_F	0.95		1.3		1.7	V
Maximum Reverse Current at $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage at $T_A = 100^\circ\text{C}$	I_R	5 100					μA
Typical Junction Capacitance at $V_R = 4\text{ V}$, $f = 1\text{ MHz}$	C_J	10					pF
Maximum Reverse Recovery Time at $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	35					ns
Operating Junction and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150					$^\circ\text{C}$

TOP DYNAMIC



Dated: 10/09/2015 Rev: 01

ES1AW THRU ES1JW-HAF

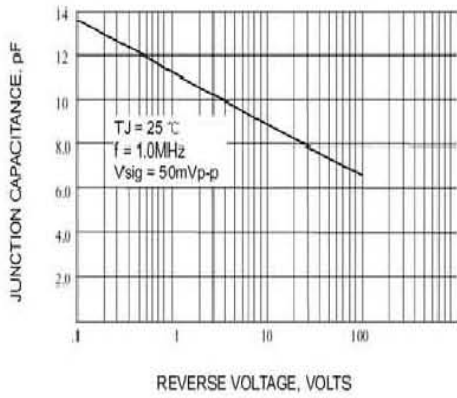


Fig.1- TYPICAL JUNCTION CAPACITANCE

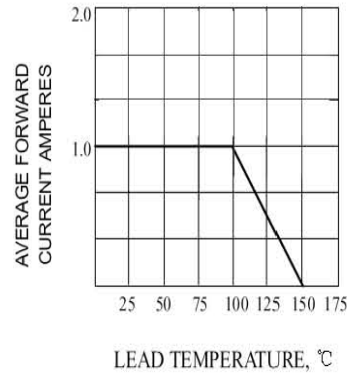


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

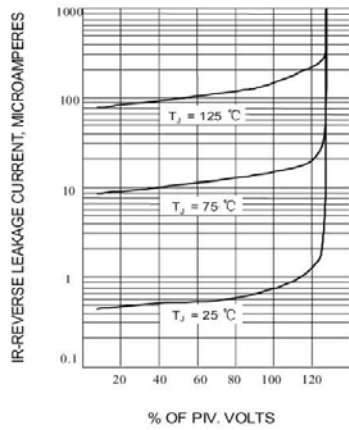


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

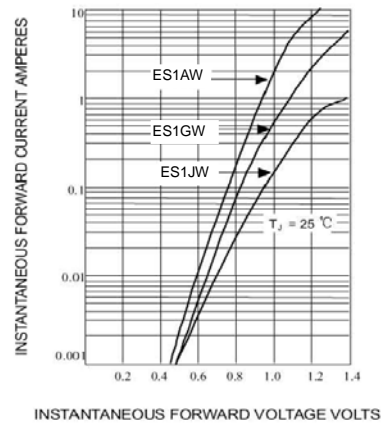


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

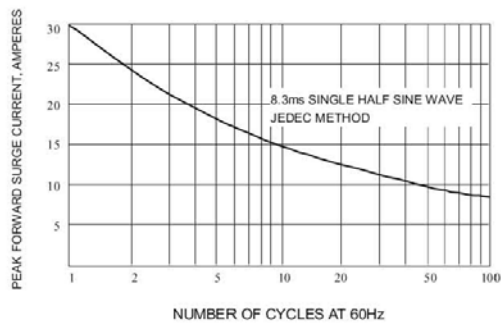


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

TOP DYNAMIC



ISO14001 : 2004 Certificate No. 121505007 ISO 9001 : 2008 Certificate No. 50114012 OHSAS 18001 : 2007 Certificate No. 0513160606 IECQ QC 080000 Certificate No. EQ410021 N1022


Dated: 10/09/2015 Rev: 01

ES1AW THRU ES1JW-HAF

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

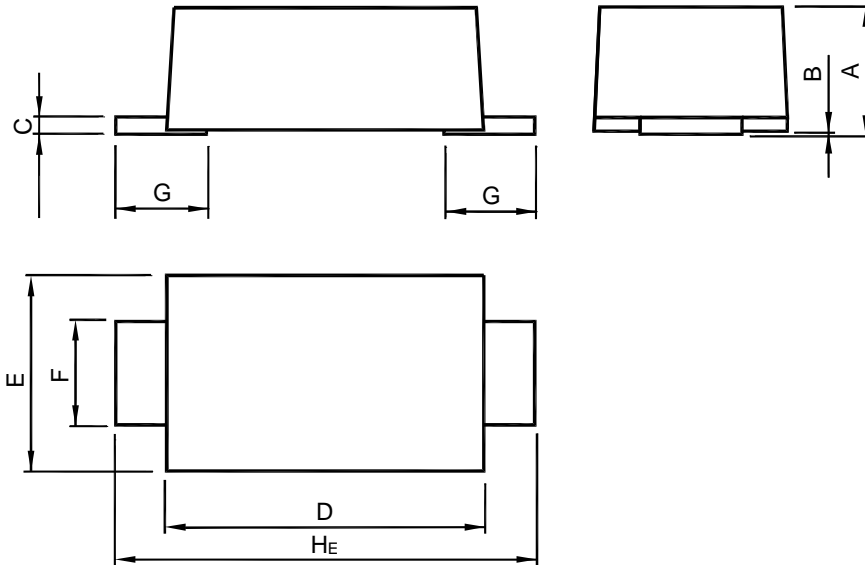

UNIT	A	B	C	D	E	F	G	H _E
mm	1.08	0.1	0.2	2.9	1.9	1.1	0.9	3.9
	0.88	0	0.1	2.6	1.7	0.8	0.7	3.5

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

TOP DYNAMIC



Dated: 10/09/2015 Rev: 01