
Tape and Reel and Packaging Specifications for SMD Diodes & Transistors

Embossed Tape and Reel is used to facilitate automatic pick and place equipment feed requirements. The tape is used as the shipping container for various products and requires a minimum of handling. The antistatic / conductive tape provides a secure cavity for the product when sealed with the "peel-back" cover tape.

- Two Reel Sizes Available (7" and 13")
- DFN1006 / DFN1608 / SOD-123FL / SOD-123HE / SOT-26 / SOT-23 / SOD-323 / SOD-323HE in 8 mm Tape
- Used for Automatic Pick and Place Feed Systems

Use the standard device title and add the required suffix as listed in the option table on the following page. Note that the individual reels have a finite number of devices depending on the type of product contained in the tape. Also note the minimum lot size is one full reel for each line item, and orders are required to be in increments of the single reel quantity.

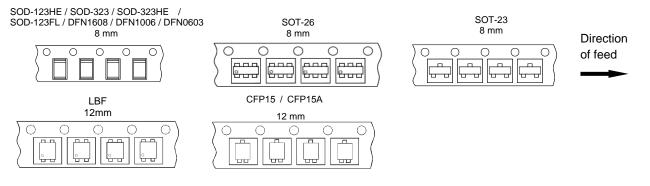

EMBOSSED TAPE AND REEL ORDERING INFORMATION

Package	Tape Width (mm)	Pitch		Reel Size		Devices Per Reel and Minimum
		mm	inch	mm	inch	Order Quantity
SOD-323	8	4 ± 0.1	0.157 ± 0.004	178 330	7 13	3,000 10,000
SOD-123HE	8	4 ± 0.1	0.157 ± 0.004	178 330	7 13	3,000 10,000
SOD-323HE	8	4 ± 0.1	0.157 ± 0.004	178 330	7 13	3,000 15,000
SOT-23 SOT-26	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000
DFN1006-2H DFN1006-2B DFN1006-3H DFN1006-3B	8	4 ± 0.1 2 ± 0.1	0.157 ± 0.004 0.079 ± 0.004	178	7	5,000 10,000
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178 330	7 13	3,000 10,000
LBF CFP15A CFP15	12	8 ± 0.1	0.315 ± 0.004	330	13	5,000
DFN1608	8	4 ± 0.1	0.157 ± 0.004	178	7	4,000
DFN0603	8	2 ± 0.05	0.78 ± 0.002	178	7	10,000



TOP DYNAMIC